

Amorim Cork Flooring, S.A.
Rua do Ribeirinho 202 - P.O. Box 13
4536-907 S. Paio de Oleiros - Portugal
T. +351 22 747 56 00 E. info.acf@amorim.com



WICANDERS

www.wicanders.com


DE	Amorim Deutschland GmbH (+49) 4221 5 93-01	info.acf.de@amorim.com
BE N E L U X	Amorim Benelux B.V. (+31) 166 604 111	info.acf.bnl@amorim.com
AT	Amorim Deutschland GmbH (+43) 154 51 65 10	info.acf.at@amorim.com
CH	Amorim Flooring Switzerland AG (+41) 41 726 20 20	info.acf.ch@amorim.com
PT	Amorim Cork Flooring, S.A. (+351) 227 475 600	info.acf@amorim.com
ES	Amorim Cork Flooring, S.A. (+351) 227 475 600	info.acf.es@amorim.com
FR	Amorim Cork Flooring, S.A. (+33) 800 914 848	info.acf.fr@amorim.com
DK	Timberman Denmark A/S (+45) 995 252 52	timberman@timberman.dk
PL	Dom Korkowy, Sp. z o.o. (+48) 126 379 639	krakow@domkorkowy.pl
US	Amorim Flooring North America (+1) 410 553 60 62	info.acf.us@amorim.com
RU	Amorim Flooring Rus, OOO (+7) 495 280 7860	info.acf.ru@amorim.com
IT	Amorim Cork Flooring, S.A. (+39) 068 635 7287	info.acf.it@amorim.com
FI	Korkkitrio Oy (+358) 50 554 2616	wicandersmyynti@korkkitrio.fi
SW	Amorim Flooring Sweden (+46) 311 077 40	info.acf.se@amorim.com



AMORIM

6474MT - Flyer Wood Infinitus NT | Sep2020

wood *Infinitus*

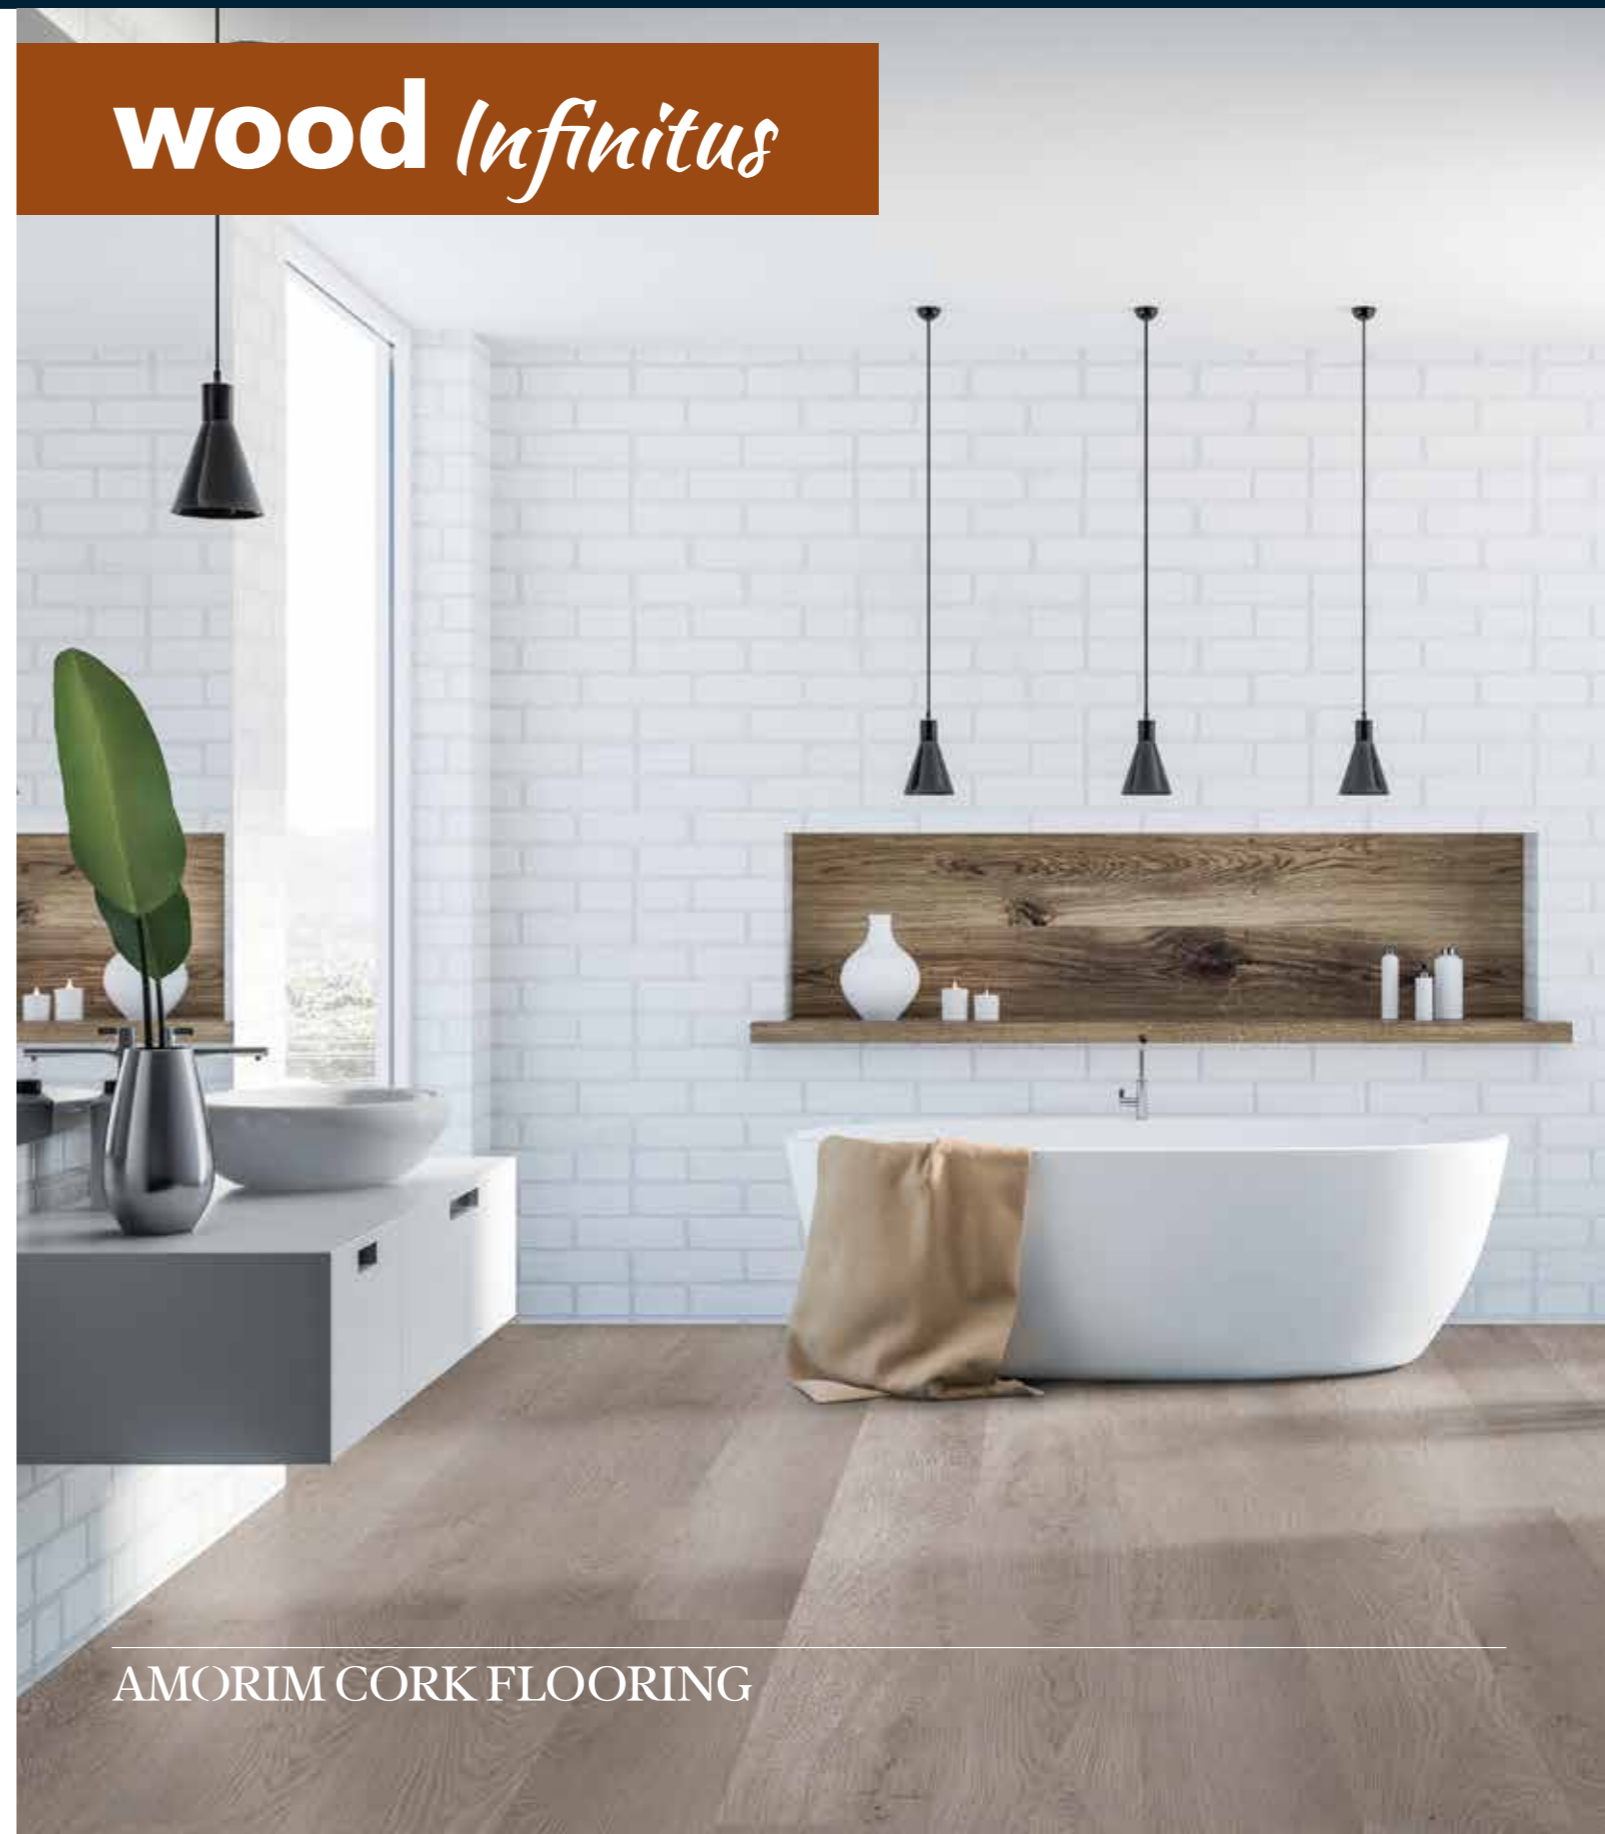

AMORIM CORK FLOORING

wood *Infinitus*

Formats

1840x220x8mm
72-7/16x8-21/32x5/16"



80000603 B4TD001 **Brown Majestic Oak**



80000602 B4TC001 **Natural Majestic Oak**



80000606 B4TG001 **Prodigy Pearl Oak**



80000601 B4TB001 **Light Majestic Oak**



80000600 B4TA001 **Smooth Solid Oak**



80000605 B4TF001 **Prodigy Bright Oak**



80000604 B4TE001 **Grey Majestic Oak**



80000608 B4TI001 **Colossal Shadow Oak**



80000607 B4TH001 **Colossal Light Oak**

These samples were cut from larger pieces. Decor and shade may vary slightly.

WICANDERS SPC INFINITUS			
Technical Data Sheet	Standard	Unit	Value
Dimension (LxWxT)	-	mm	1840x220x8
Mass per unit	-	kg/m ²	11,6
Packaging (box / pallet)	-	m ²	2,429 / 77,728
Level of use Domestic	ISO 10874	Class	23
Level of use Commercial	ISO 10874	Class	33

General properties - EN 16511			
Thickness, t -	ISO 24337	" $\Delta t_{avg} \leq 0,50$ mm, relative to nominal value / $t_{max} - t_{min} \leq 0,50$ mm"	Complies
Length, l	ISO 24337	" ≤ 1500 mm: $\Delta l \leq 0,5$ mm / > 1500 mm: $\Delta l \leq 0,3$ mm/m"	Complies
Width, w	ISO 24337	" $\Delta w_{avg} \leq 0,10$ mm, relative to nominal value / $w_{max} - w_{min} \leq 0,20$ mm"	Complies
Squareness, q	ISO 24337	max $\leq 0,20$ mm	Complies
Straightness, s	ISO 24337	max $\leq 0,30$ mm/m	Complies
Openings, o	ISO 24337	max $\leq 0,20$ mm	Complies
Height difference, h	ISO 24337	hmax $\leq 0,15$ mm	Complies
Flatness of the panel (Length - concave / convex)	ISO 24337	concave $\leq 0,50$ % / convex $\leq 1,0$ %	Complies
Flatness of the panel (Width - concave / convex)	ISO 24337	concave $\leq 0,15$ % / convex $\leq 0,20$ %	Complies

Classification properties - EN 16511			
Wear resistance IP	EN 15468, procedure B	≥ 5000 cycles	Complies
Impact resistance [mm] (big ball)	EN 13329-2006 + A1-2008, Annex F	≥ 1600 mm	Complies
Castor chair resistance	EN 425	25 000 cycles	Complies
Resistance to staining	EN 438-2	"Groups 1 and 2; grade 5 / Group 3; grade 4"	Complies
Residual Indentation	EN ISO 24343-1	$\leq 0,2$ mm	Complies
Swelling	ISO 24336	≤ 18 %	Complies

Safety properties - EN 14041			
Fire resistance	EN ISO 11925-2 + EN ISO 9239-1; Class EN 13501-1	Class	Bfl-s1
Slip Classification	EN 13893	Class	DS
Formaldehyde emission	EN 717-1	Class	E1
Content pentachlorophenol (PCP)	"EN 14041 Annex B"	mg/kg	Undetectable

Additional properties			
Impact sound reduction	EN ISO 10140	dB (ΔL_w)	*
Walking noise	IHD-W431	"dB %"	*
Thermal resistance (Thermal conductivity)	EN ISO 10456	m ² K/W	*
Slip Resistance	DIN 51130	-	R9

ASTM Standards			
Residual indentation	ASTM F1914	avg . 0.007 in. (0.18 mm)	*
Static load limit	ASTM F970 / F387	"max loading: 250 lb/in.2 (1.72 MPa) max residual indent: 0.005 in. (0.13 mm)"	*
Squareness	ASTM F2055	max 0.010 in. (0.25 mm)	*
Dimensional Stability	ASTM F2199 / ISO 23999	0.25 % / lineal ft (305 mm) max	*
Thickness (with back layer)	ASTM F387	"as specified ± 0.008 in. (0.20 mm) min 0.080 in. (2.0 mm)"	*
Airborne sound transmission loss	ASTM E90 / ASTM E413	STC (dB)	*
Impact sound transmission	ASTM E492 / ASTM E989	IIC (dB)	*
Impact sound transmission	ASTM E2179	ΔIIC	*

*test on going
(a) Grade 5 - No change / Grade 4 - Slight change / Grade 3 - Moderate change / Grade 2 - Considerable change / Grade 1 - Strong change

The ultimate waterproof product that combines Resistance, Performance and Design. Long and wider planks with wood designs, INFINITUS will give your space a distinguished and contemporary look.

Infinitus is an optimal choice for renovation projects, as it requires minimum subfloor preparation, is also a low thickness product and is suitable for high traffic commercial areas.

Performed with 5Gi easy installation system for a flawless floor laying, INFINITUS is the perfect fusion of performance and design.

